



20t

R(m)	Max capacity (m/t)	20	25	30	35	40	45	50	55	60	65	70	75		
75	b	5.0~29.2				10.00	8.06	6.86	5.93	5.19	4.59	4.09	3.67	3.31	3.00
	bb	4.0~15.3	14.48	10.98	8.69	7.08	5.87	4.95	4.21	3.61	3.11	2.69	2.33	2.02	
70	b	5.0~30.3				10.00	8.44	7.19	6.23	5.46	4.83	4.31	3.87	3.50	
	bb	4.0~15.9	15.17	11.52	9.14	7.46	6.21	5.24	4.47	3.85	3.33	2.89	2.52		
65	b	5.0~32.2				10.00	9.06	7.73	6.70	5.88	5.22	4.67	4.20		
	bb	4.0~16.8	16.26	12.39	9.86	8.07	6.74	5.72	4.90	4.23	3.68	3.22			
60	b	5.0~33.9				10.00	9.63	8.23	7.15	6.29	5.58	5.00			
	bb	4.0~17.7	17.30	13.21	10.54	8.65	7.25	6.16	5.30	4.60	4.02				
55	b	5.0~35.4				10.00	8.67	7.54	6.63	5.90					
	bb	4.0~18.5	18.20	13.93	11.13	9.15	7.69	6.55	5.65	4.92					
50	b	5.0~36.1				10.00	8.88	7.72	6.80						
	bb	4.0~18.8	18.63	14.26	11.41	9.39	7.89	6.74	5.82						
45	b	5.0~36.4				10.00	8.97	7.80							
	bb	4.0~19.0	18.81	14.41	11.53	9.49	7.98	6.82							
40	b	5.0~36.6				10.00	9.00								
	bb	4.0~19.0	18.88	14.46	11.57	9.53	8.02								
35	b	5.0~35.0				10.00									
	bb	4.0~19.2	19.03	14.58	11.67	9.62									
30	b	5.0~30.0				10.00									
	bb	4.0~19.2	19.10	14.64	11.72										

Mechanisms				bd			bd				kW
				III	IV	V	III	IV	V		
				Hoisting	12t	H60FP30-530P	m/min	N/A	50	100	17.5
t	N/A	6	3				12	12	6		
16t	H60FL40-600P	m/min	N/A		38	76	13	19	38	600m \varnothing (6 layers)	60
		t	N/A		8	4	16	16	8		
20t	H75FP50-800P	m/min	38	76	115	19	38	57.5	680m \varnothing (6 layers)	75	
		t	10	5.0	1.5	20	10	3.0			
Trolleying	BP75A		m/min	0~80						7.5	
Slewing	S145TA-130.146LB14/12B S145TN-130.146LB14/12B		r/min	0~0.7						2x145 N.m	
Travelling	ZAH52A-Dx2 ZDH52A-Dx2		m/min	0~25						4x5.2	
			380V($\pm 10\%$) 50Hz	12t: 82.5+5.2x4kW; 16t: 82.5+5.2x4 kW; 20t: 97.5+4x5.2 kW							




Zoomlion Heavy Industry Science & Technology Co.,Ltd,
Add: No.677 Lugu Road Zoomlion Industrial Park Changsha, Hunan, China, 410205





Copyright © 2017 Zoomlion. All rights reserved. Reproduction and copying of any part of the contents is not allowed for any purposes without Zoomlion's written approval.
Note: No product coating appearance shall be subject to sample.

T7530

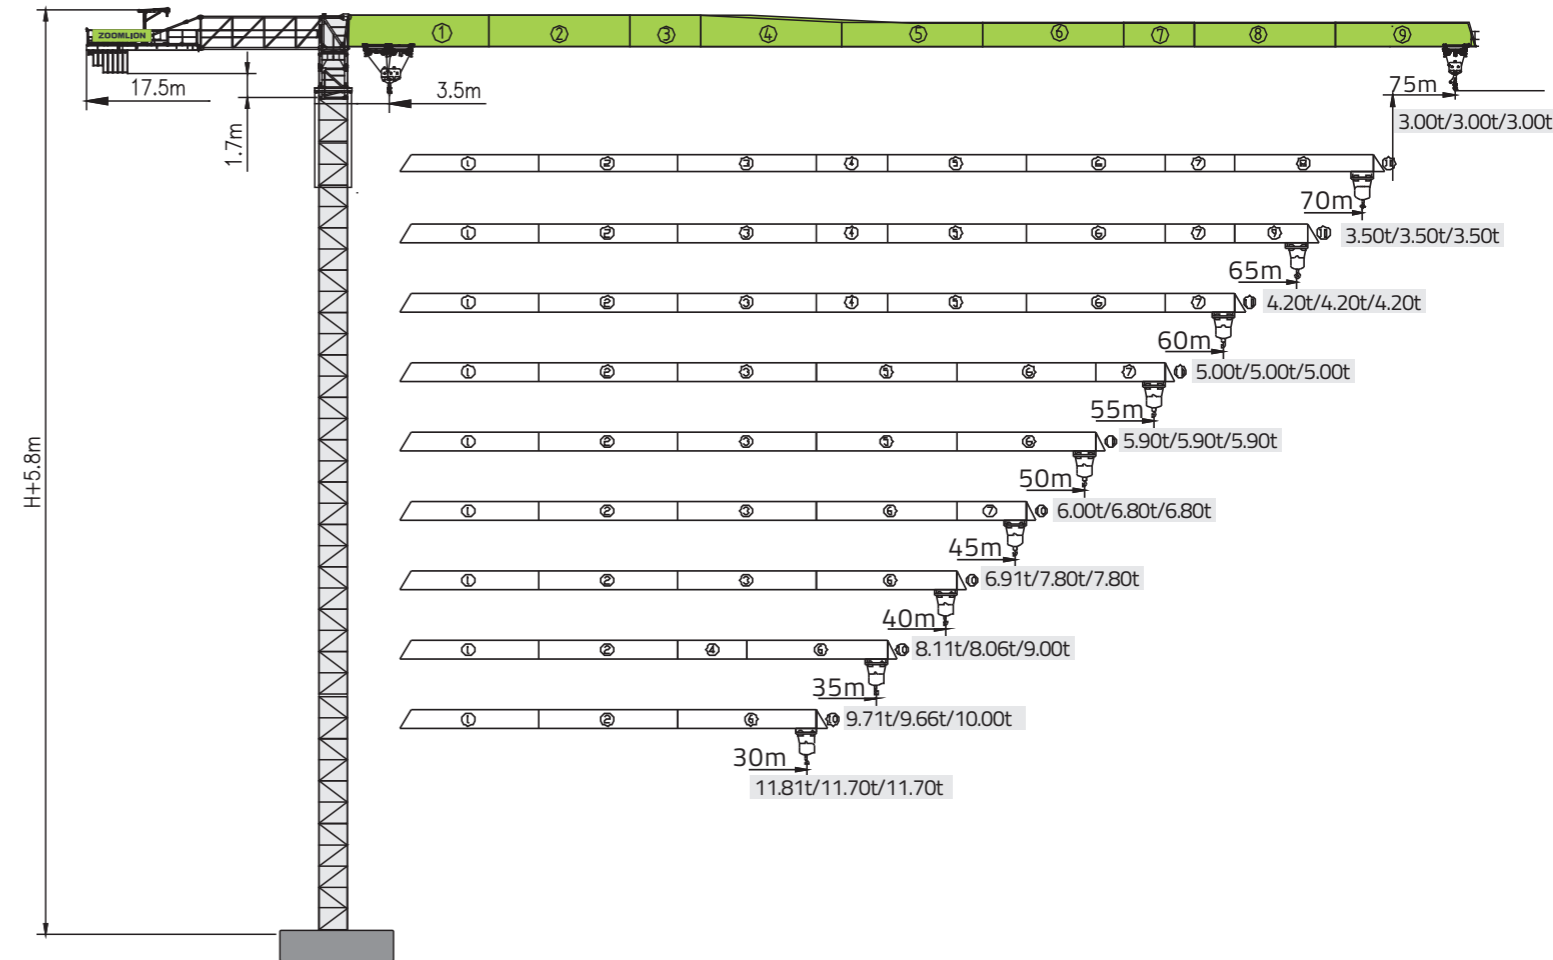12t/16t/20t



		 (Kg)	PHZ3000	PHZ2500	PHZ1300
75m	21.0m	33000	4	1	2
70m	21.0m	31500	3	2	2
65m	21.0m	30000	4	2	0
60m	21.0m	29500	4	1	1
55m	21.0m	28000	3	2	1
50m	21.0m	24000	3	1	1
45m	21.0m	23500	3	0	2
40m	17.0m	30000	4	2	0
35m	17.0m	28000	3	2	1
30m	17.0m	24000	3	1	1

